




78 Series DiggerDrive™

3,200 TO 12,000 FT-LB TORQUE (TWO SPEED)

Data Sheet 7078

The series 78 is a heavy duty two speed DiggerDrive™ with hydraulic shift-on-the-fly design for multiple applications, from pier and foundation work to anchor installation. High-speed to low-speed adaptability for varying soil conditions.

- Now available with automatic “Kickdown” shifting to low-speed high-torque position while augering.

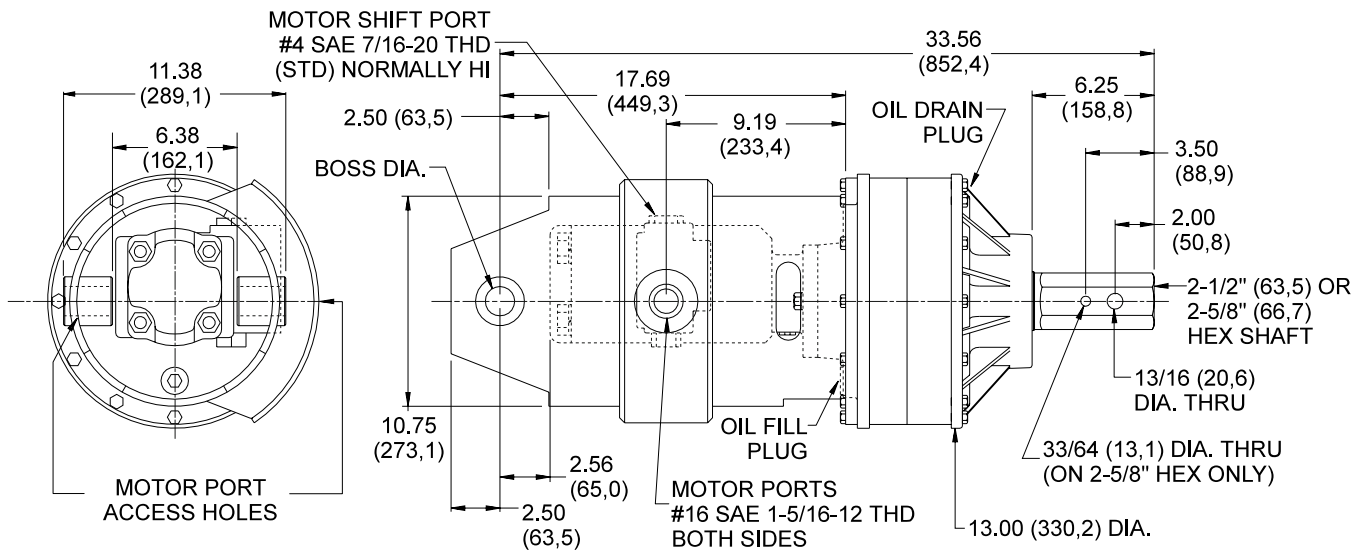

TWO SPEED SHIFT-ON-THE-FLY OR OPTIONAL SINGLE SPEED
HEAVY DUTY, HIGH EFFICIENCY, DOUBLE PLANETARY DRIVE

SHAFT SIDE LOADING NOT RECOMMENDED

TECHNICAL SPECIFICATIONS

MOTORS: 1 & 2-SPEED GEAR TYPE
MOTOR MOUNT: SAE "C" 2-BOLT AND 4-BOLT
RATED OUTPUT TORQUES: TO 12,000 ft-lb (16,272 N-m)
MAXIMUM SYSTEM PRESSURE: 2,500 psi (172,4 bar)
SHIFTING PRESSURE: 300 psi (20,7 bar) MINIMUM, 2500 psi (172,4 bar) MAXIMUM
MOTOR CASE DRAIN: REQUIRED
OUTPUT SHAFT: 2-1/2" (63,5 mm) OR 2-5/8" (66,7 mm) HEX
SHAFT PULL-OUT LOAD: 28,000 lb (6804 kg)
SHAFT PRESSURE LOAD: 15,000 lb (6804 kg)
OIL CAPACITY: 6.5 pts (3,1 l)
BAIL BOSS DIAMETER: 1.26" (32,00 mm) OR 1.51" (38,35 mm)
WEIGHT: 370 lb (168.2 kg)

For more information regarding Planetary Diggerdrives and other innovative products, feel free to contact us at:



ESKRIDGE

1900 Kansas City Road • Olathe, Kansas 66061 • USA

PHONE: (913) 782-1238 • FAX: (913) 782-4206

WEBSITE: www.eskridgeinc.com • E-MAIL: sales@eskridgeinc.com

Performance Data


MODEL	MOTOR	MOTOR PRESSURE	FLOW gpm	RATED TORQUE/SPEED	
				HIGH SPEED	LOW SPEED
7835	17	2400	40	3,750 ft-lb-52rpm	9,500 ft-lb-26rpm
	18	2400	40	2,340 ft-lb-82rpm	8,900 ft-lb-27rpm
	58	2400	40	2,340 ft-lb-82rpm	8,903 ft-lb-27rpm
7848	12	2400	40		11,500 ft-lb-19rpm
	18	2400	40	3,200 ft-lb-21rpm	12,000 ft-lb-18rpm
	58	2400	40	3,200 ft-lb-21rpm	12,000 ft-lb-18rpm

* Maximum intermittent value.

NOTES:

- STARTING TORQUES ARE APPROXIMATELY 25% LESS THAN RUNNING TORQUES.
- SYSTEM BACK PRESSURE WILL REDUCE THE RUNNING TORQUES PROPORTIONALLY.
- BACK PRESSURE SHOULD BE LIMITED TO 100 psi (6,9 bar).
- MAXIMUM FLOW RATE IS DEPENDENT UPON MOTOR DISPLACEMENTS.
- HIGH ALLOY HEAT TREATED BAIL BOSS PINS REQUIRED (CUSTOMER PROVIDED).

Ordering Information

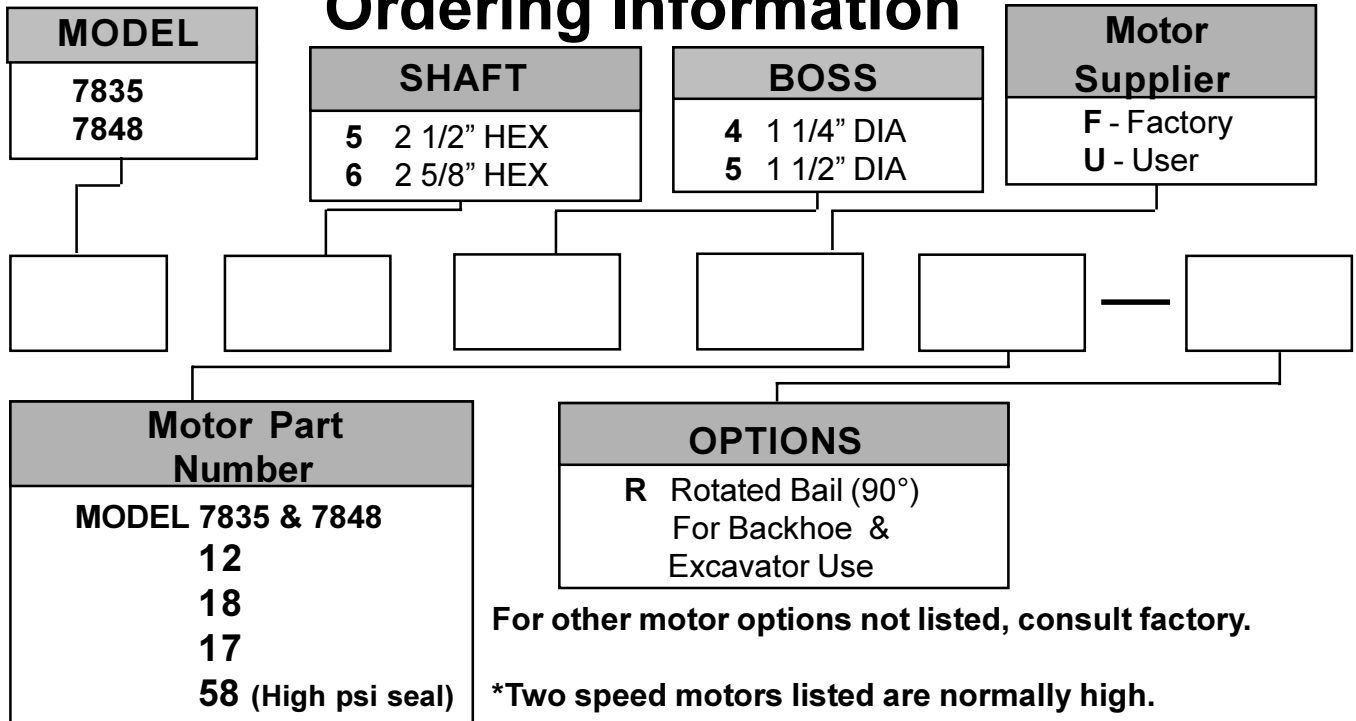

For other motor options not listed, consult factory.

*Two speed motors listed are normally high.
For normally low motor option consult factory.

IMPORTANT INFORMATION...

ESKRIDGE, INC. EXPRESSLY DISCLAIMS ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR ANY PARTICULAR PURPOSE FOR THE PRODUCTS SHOWN HEREIN.

Any claims based on or related to the products shown herein will be satisfied only by repair or replacement in Eskridge, Inc.'s sole discretion to the extent covered by Eskridge's Product Warranty. Eskridge, Inc. is not liable for incidental or consequential damage of any kind or nature that relate in any way to the products shown herein. For complete warranty information, please refer to Eskridge, Inc.'s Product Warranty that applies to the products shown herein and is incorporated by this reference as if fully set forth. A copy of Eskridge, Inc.'s Product Warranty can be obtained by writing Eskridge, Inc. at P.O. Box 875, 1900 Kansas City Road, Olathe, Kansas 66061